


TEHNI

PANTELOS GROUP OF COMPANIES

The door specialists

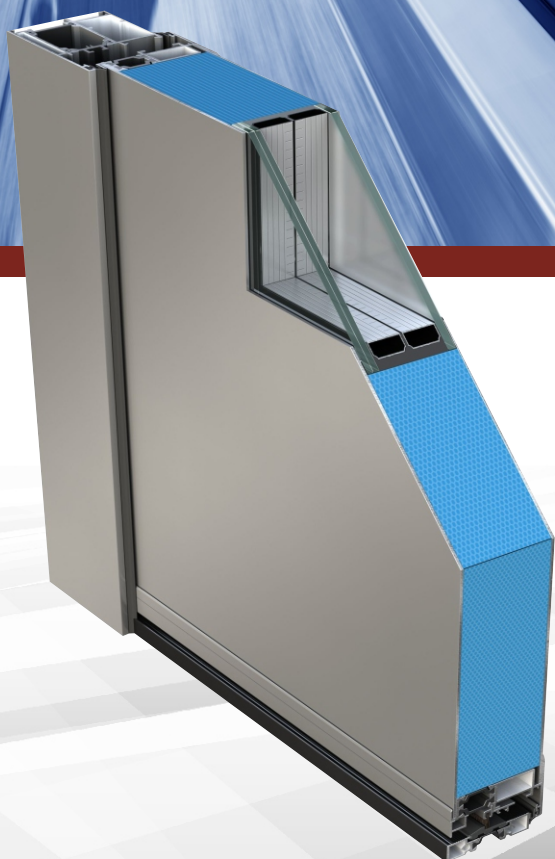

TLS50

Door System


TEHNI

PANTELOS GROUP OF COMPANIES


TLS50

Door System

Available Frames

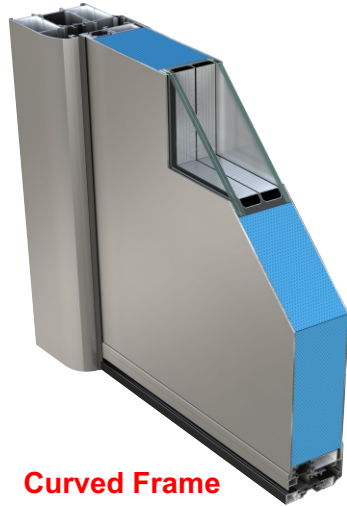

Curved Frame

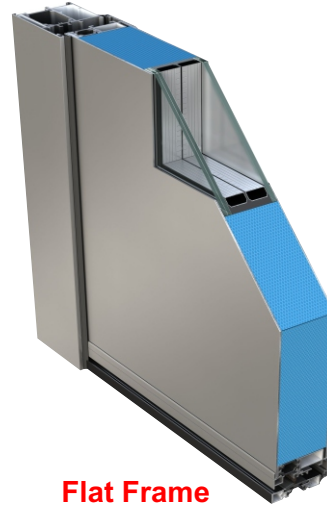

Flat Frame

Certifications

Thermal
Transmission
Coefficient

$U = 1,4$ W/(mK)

Burglar
Resistance



Air permeability according to EN 12207:2016-12



Class: 2

Resistance to wind load according to EN 12210:2016-03



Class: C3/B3

Watertightness according to EN 12208:1999-11





Class: 1A

TLS 50 Specifications

	Curved	Flat
Profile dimensions (Frame + Sash)	76,1 mm	60,5 mm
Internal aluminium sheet thickness		1,5 mm
External aluminium sheet thickness		1,5 mm
CNC design internally		Yes
INOX decoratives internally		No
Door Panel thickness		50 mm
Minimum door height		1920 mm
Minimum door width		960 mm
Maximum door height		2200 mm
Maximum door width		1100 mm
Main Door Glass	Double / Triplex 3+3 4 mm	
Sidelight or Skylight Glass	Double / Triplex 3+3 4 mm	

Profile Section

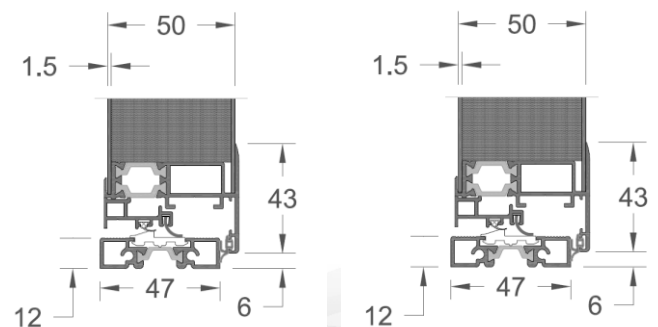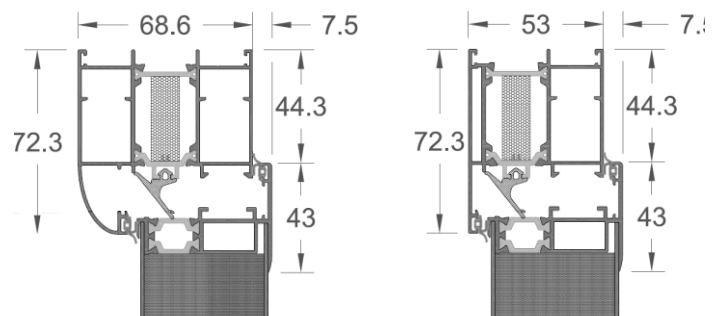


Curved Frame

Flat Frame

TLS50

Door Systems

Standard Configuration

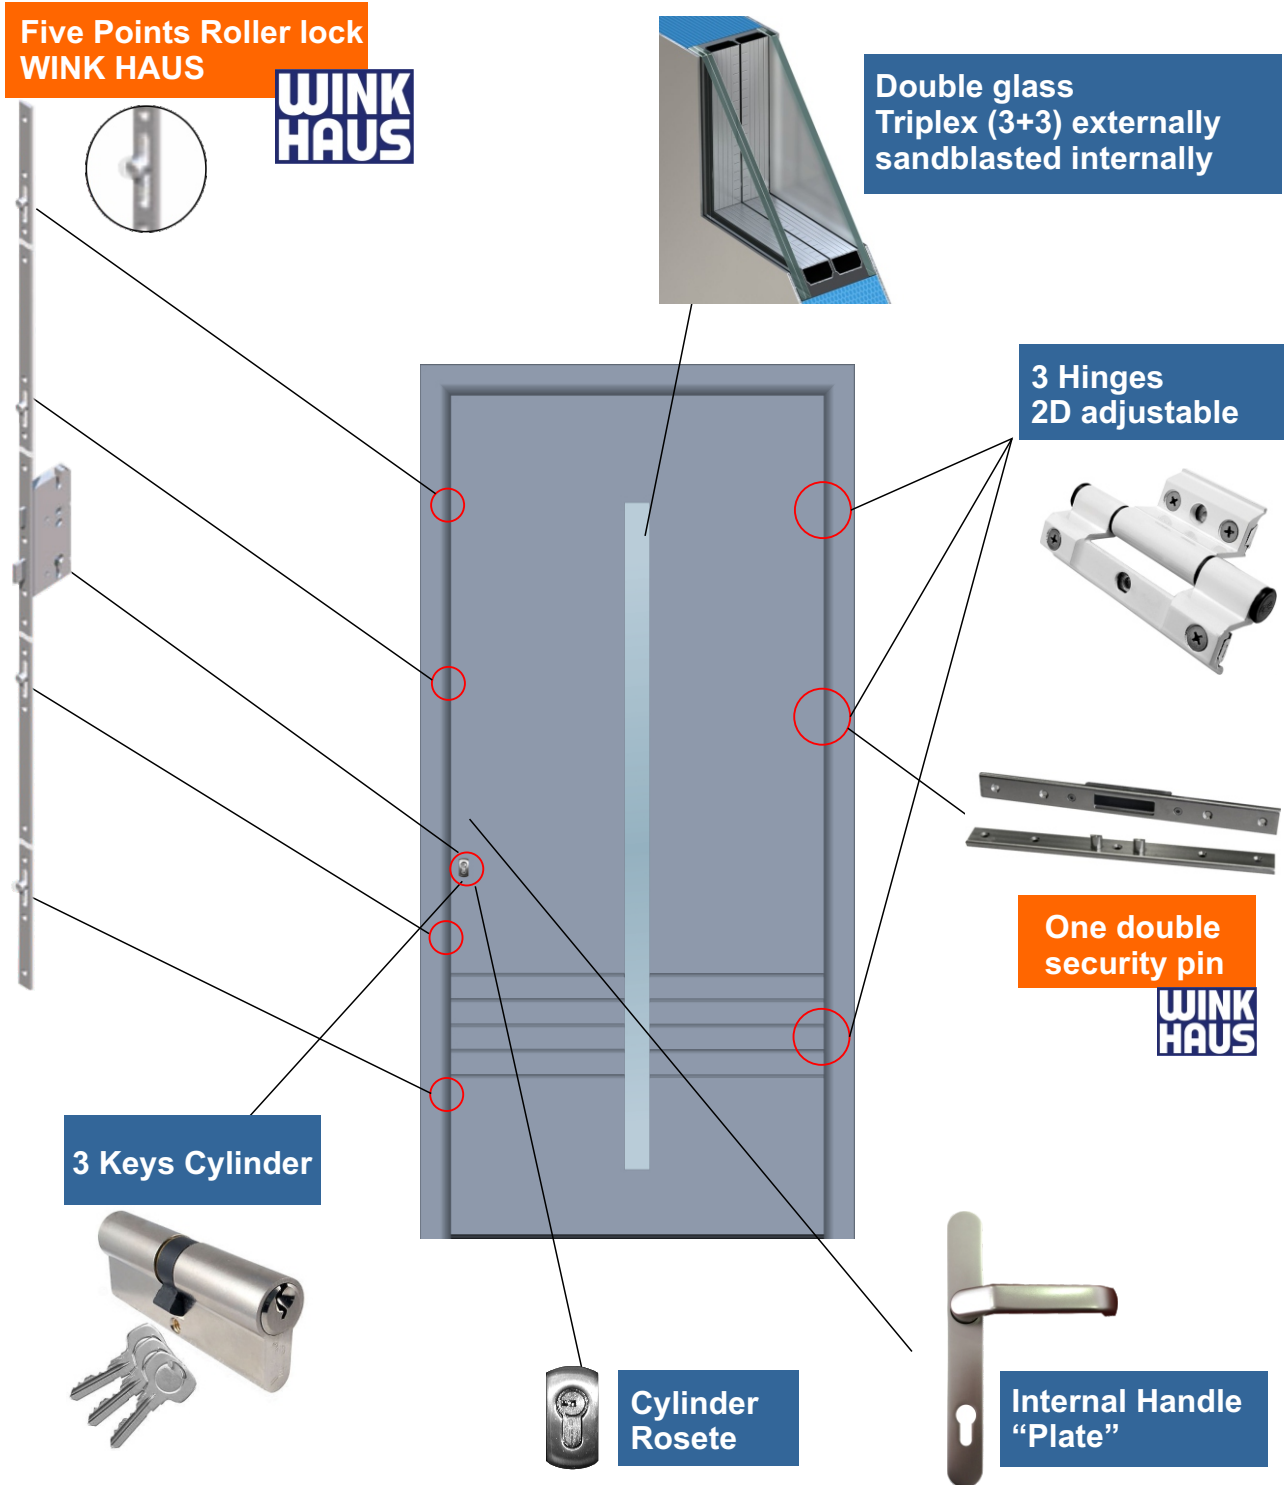

RAL **Mat** colors without extra charge :

White 3004 7001 7016 8017 9006 9007 7016



Structura